


NOTE:  
TRIPLE WALLS TO STOP 100mm ABOVE CEILING  
FOR HVAC AND VENTILATION DUCTING. FULL  
HEIGHT WALLS ONLY WHERE OPENINGS ARE  
INDICATED.

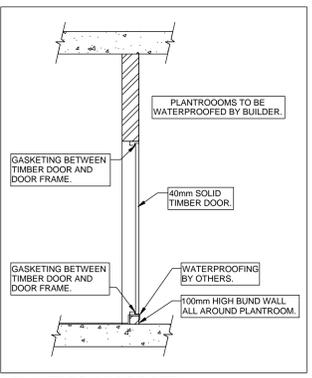

PLANTROOM DOOR DETAIL

- LEGEND**
- [F] FIRE SIGNAL TO PANEL IN PLANTROOMS BY OTHERS
  - [⊗] 240V POWER 5 AMP SUPPLY AND ISOLATOR IN CEILING VOID FOR AC UNIT BY ARVENT
  - [⊗] 400V POWER SUPPLY & ISOLATOR TO PANEL BY OTHERS - TO UNIT BY ARVENT
  - [⊕] 50W ROUND WALL BOX POSITIONED NEXT TO LIGHT SWITCH BY ARVENT. 20W CONDUIT TO BE CHASED IN WALL TO ABOVE CEILING BY ARVENT
  - [AH] 50W ROUND WALL BOX POSITIONED NEXT TO LIGHT SWITCH BY ARVENT. 20W CONDUIT TO BE CHASED IN WALL TO ABOVE CEILING BY ARVENT
  - [R] MIDWALL UNIT REMOTE
  - [⊙] TRAPPED DRAIN POINT IN CEILING VOID WITHIN 2.5m FROM UNIT
  - [⊕] DOOR GRILLE, SUPPLIED BY TEKMER AIR AND FITTED BY OTHERS
  - [⊗] DOOR TO BE UNDERCUT BY 25mm BY OTHERS
  - [S] UNIT AVERAGING SENSOR - BY ARVENT